

RESERVED CHANNEL SEWER SEPARATION PROJECT

BWSC Contract #08-309-009

UPDATE – through March 31, 2010

The Boston Water and Sewer Commission is pleased to provide this update for Contract 2 of the Reserved Channel Sewer Separation Project. Construction is taking place in streets in the area generally bounded by East First Street, East Fourth Street, Farragut Road and M Street. The following update summarizes work completed and a 3-month look-ahead schedule. The project team has been coordinating closely with National Grid and with the MBTA for bus route modifications. Coordination with Massport/Conley Terminal is also ongoing to maintain access during construction on East First Street and Farragut Road.

Work Completed

East First Street –

- 15" sanitary sewer (Farragut Rd. to Lee Playground)
- 19" storm drain (O St. to Lee Playground)
- 36" x 40" storm drain liner (Farragut Rd. to P St. and O St. to #849)

East Second Street –

- 15" and 21" sanitary sewer (at O St.)
- 18" storm drain (O St. to N St.)
- 60" storm drain (Farragut Rd. to P St.)
- 48" storm drain (P St. to O St.)

East Third Street –

- 12" sanitary sewer liner (N St. to #731)
- 12" sanitary sewer liner (Farragut Rd. to #828)
- 12" sanitary sewer (Farragut Rd. to #836)
- 12" storm drain (P St. to #790)

East Fourth Street –

- 16" x 24" sanitary sewer liner (O St. to #833)

Farragut Road –

- 12" water main (E. First St. to E. Third St.)
- 12" storm drain (E. Broadway to E. Fourth St.)
- 15" storm drain (E. Second St. to E. Fourth St.)
- 18" storm drain (E. Second St. to E. Third St.)
- 66" storm drain (E. First St. to E. Second St.) and connection at E. First St.

N Street –

- 12" sanitary sewer (E. Third St. to E. Broadway)
- 12" storm drain connection (at Independence Square Park)

O Street –

- 18" storm drain (E. First St. to E. Second St.)
- 36" storm drain (E. Second St. to #72)

P Street –

- 12" x 18" sanitary sewer liner (E. Broadway to E. Third St.)
- 15" sanitary sewer (E. Broadway to E. Fourth St.)
- 18" x 24" sanitary sewer liner (E. Third St. to E. Second St.)
- 12" storm drain (E. First St. to Kemble Place)
- 15" storm drain (E. Third St. to E. Fourth St.)
- 36" storm drain (E. Second St. to E. Third St.)

East Broadway –

- 12" storm drain (Farragut Rd. to #942)

Ongoing/Upcoming Work

East Fourth Street –


- 24" storm drain (N St. to O St.)
- 12" sewer (P St. to #878)

East Broadway –

- 8" water main (Farragut Rd. to M St.)
- 12" storm drain (P St. to #894)
- 12" storm drain (O St. to #854)
- 12" storm drain (N St. to #811)
- 12" and 15" storm drain (#853 to #886)
- 15" storm drain (O St. to #888)

O Street –

- 36" storm drain (E. Second St. to E. Broadway)
- 24" storm drain (E. Broadway to E. Fourth St.)

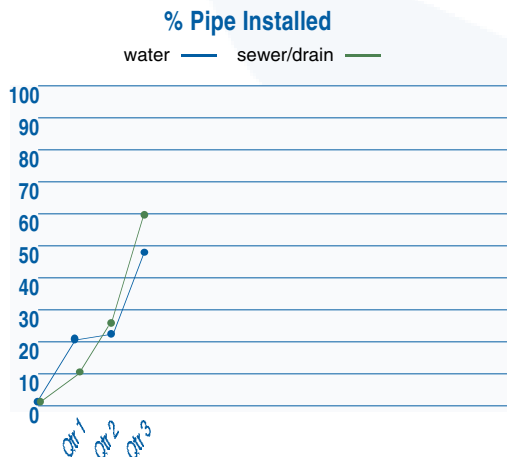

New brick invert in Manhole D between new 66" storm drain and existing tidegate structure in Farragut Rd.

If you have any questions or concerns during the project, please let us know.

Contact us at:

Project Field Office – 840 Summer Street, 2nd Floor, 617-268-2046

BWSC 24/7 Emergency – 617-989-7000